

## WFN

## Water cooled heat pump reversible water side

Cooling capacity 182 ÷ 2349 kW  
Heating capacity 205 ÷ 2610 kW

- Production of hot water up to 55°C.
- Production of negative chilled water down to -8°C.



**AERMEC AI**



### DESCRIPTION

Units for internal installation offering chilled/hot water, designed to meet air conditioning needs in residential/commercial complexes or industrial applications.

Compact and flexible, perfect alignment to the requested load thanks to an accurate control algorithm.

The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

### VERSIONS

° Standard

A High efficiency

### FEATURES

#### Operating field

Production of chilled water up to 16°C of water produced on the evaporator side, but also suitable for use in heat pump mode with condenser water temperature up to 55°C.

**With option Z (double electronic expansion valve) the unit is capable to produce chilled water temperature from -8°C up to 10°C.**

#### Mono, bi-tri circuit unit

Unit with 2-3 refrigerant circuits designed to provide maximum efficiency at full load, ensuring high efficiency at partial loads also and ensuring continuity in case one of the circuits stops.

They are equipped with screw compressors and system and source side shell and tube heat exchangers with R134a refrigerant.

**The R513A (XP10) refrigerant with this type of gas is also available on the configurator. On average, the units have a yield > 2% and an EER < 3% compared to the same size with R134a.**

For further details refer to the technical documentation or to the Magellano selection program.

#### Electronic expansion valve

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy efficiency of the unit. Standard for all sizes.

### CONTROL PCO<sub>5</sub>

Microprocessor adjustment, with 4.3" touch screen keyboard, which allows to navigate intuitively among the various screens, allowing to modify the operating parameters and graphically view the progress of some variables in real time and the adjustment includes complete management of the alarms and their log.

Adjustment includes complete management of the alarms and their log.

The possibility to control several units in Master - Slave parallel mode up to a maximum of 4 compressors.

The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.

The temperature control takes place with the integral proportional logic, based on the water output temperature.

### ACCESSORIES

**AER485P1:** RS-485 interface for supervising systems with MODBUS protocol. 1 accessory is provided for each unit control board.

**AERBAC-ONE:** Ethernet communication interface for Bacnet/IP and Modbus TCP/IP protocols, HTTPS protocol for web interface, encrypted communication protocols and access credential management in accordance with the latest standards. One accessory is provided for each unit control board.

**AERBACP:** Ethernet communication interface for Bacnet/IP and Modbus TCP/IP protocols. 1 accessory is provided for each unit control board.

**AERNET:** The device remotely controls, manages and remotely monitors a chiller/heat pump using a PC, smartphone or tablet via a Cloud connection. AERNET acts as Master while each connected unit is configured as Slave up to a maximum of 6 control cards. The connection is made via cable and/or USB key. Wi-Fi connectivity is not available. It is also possible to save a log file with all the data from the connected units to your terminal with a simple click for possible post-analysis. With the purchase of the Router, the Customer benefits from a 24-month free period during which he can use the Aernet Service at no additional cost. At the end of this initial period, the Service may be renewed by subscribing to a 1, 2 or 3 year subscription. For further details on costs and renewal methods, please contact our office or consult the technical documentation available on our website. [www.aermec.com](http://www.aermec.com).

**MULTICHILLER-EVO:** Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel (max. no. 9), always ensuring constant flow rate to the evaporators.

**PGD1:** Allows you to control the unit at a distance.

**SGD:** Electronic board designed to receive external signals from the electricity grid or energy suppliers, converting them into Modbus commands for our units. This system allows you to vary the operation of our generators to optimise consumption based on electricity prices, grid load or the availability of renewable sources. The key principle of the standard is demand response: shifting consumption from peak demand times to times when energy is cheaper and more environmentally sustainable.

**AVX:** Spring anti-vibration supports.

## FACTORY FITTED ACCESSORIES

**RIF:** Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.

**ISG:** Insulation kit for condensers. Mandatory accessory for machine functioning in heat pump; standard in units with desuperheater or with heat recovery.

## ACCESSORIES COMPATIBILITY

| Model              | Ver | 0701 | 0801 | 0901 | 1101 | 1251 | 1401 | 1601 | 1801 | 2101 | 2401 | 2502 | 2801 | 2802 | 3201 | 3202 | 3602 | 4202 | 4802 | 5602 | 6402 | 6703 | 7203 | 8403 | 9603 |
|--------------------|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| AER48SP1           | A   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AER48SP1 x no. 2   | A   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AER48SP1 x no. 3   | °,A | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AERBAC-ONE         | A   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AERBAC-ONE x no. 2 | A   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AERBAC-ONE x no. 3 | °,A | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AERBACP            | A   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AERBACP x no. 2    | A   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AERBACP x no. 3    | °,A | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| AERNET             | °   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| MULTICHILLER-EVO   | A   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| PGD1               | °   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |
| SGD                | A   | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    | .    |

## Antivibration

| Version | Set-up | Heat recovery | 0701        | 0801        | 0901        | 1101        | 1251        |
|---------|--------|---------------|-------------|-------------|-------------|-------------|-------------|
| °       | °,K,L  | °,D,T         | -           | -           | -           | -           | -           |
| A       | °,K,L  | °             | AVX680      | AVX680      | AVX680      | AVX681      | AVX681      |
| A       | °,K,L  | D,T           | -           | -           | -           | -           | -           |
| Version | Set-up | Heat recovery | 1401        | 1601        | 1801        | 2101        | 2401        |
| °       | °,K,L  | °,D,T         | -           | -           | -           | -           | -           |
| A       | °      | °             | AVX681      | AVX682      | AVX682      | AVX683      | AVX683      |
| A       | K      | °             | AVX688      | AVX683      | AVX683      | AVX683      | AVX683      |
| A       | L      | °             | AVX681      | AVX682      | AVX685      | AVX683      | AVX683      |
| A       | °,K,L  | D,T           | -           | -           | -           | -           | -           |
| Version | Set-up | Heat recovery | 2502        | 2801        | 2802        | 3201        | 3202        |
| °       | °,K,L  | °,D,T         | -           | -           | -           | -           | -           |
| A       | °      | °             | AVX673      | AVX683      | AVX674      | AVX683      | AVX679      |
| A       | K      | °             | Contact us. | AVX686      | Contact us. | AVX686      | Contact us. |
| A       | L      | °             | AVX674      | AVX683      | AVX674      | AVX683      | AVX678      |
| A       | °      | D             | AVX674      | -           | AVX674      | -           | AVX679      |
| A       | °      | T             | AVX674      | -           | AVX674      | -           | AVX678      |
| A       | L      | D,T           | AVX674      | -           | AVX674      | -           | AVX678      |
| A       | K      | D,T           | Contact us. | -           | Contact us. | -           | Contact us. |
| Version | Set-up | Heat recovery | 3602        | 4202        | 4802        | 5602        | 6402        |
| °       | °,K,L  | °,D,T         | -           | -           | -           | -           | -           |
| A       | °      | °,D           | AVX679      | AVX678      | AVX678      | AVX678      | AVX678      |
| A       | K      | °,D,T         | Contact us. | Contact us. | Contact us. | Contact us. | Contact us. |
| A       | °      | T             | AVX678      | AVX678      | AVX678      | AVX678      | AVX678      |
| A       | L      | °,D           | AVX678      | AVX678      | AVX678      | AVX678      | AVX678      |
| A       | L      | T             | AVX678      | AVX678      | AVX676      | AVX676      | AVX676      |
| Version | Set-up | Heat recovery | 6703        | 7203        | 8403        | 9603        |             |
| °       | °,K,L  | °,D,T         | Contact us. | Contact us. | Contact us. | Contact us. |             |
| A       | °,K,L  | °,D,T         | Contact us. | Contact us. | Contact us. | Contact us. |             |

- not available

## Power factor correction

| Ver | 0701       | 0801       | 0901       | 1101       | 1251       | 1401       | 1601       | 1801       | 2101       | 2401       | 2502       | 2801       |
|-----|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| A   | RIFWFN0701 | RIFWFN0801 | RIFWFN0901 | RIFWFN1101 | RIFWFN1251 | RIFWFN1401 | RIFWFN1601 | RIFWFN1801 | RIFWFN2101 | RIFWFN2401 | RIFWFN2502 | RIFWFN2801 |

A grey background indicates the accessory must be assembled in the factory

| Ver | 2802       | 3201       | 3202       | 3602       | 4202       | 4802       | 5602       | 6402       | 6703       | 7203       | 8403       | 9603       |
|-----|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| °   | -          | -          | -          | -          | -          | -          | -          | -          | RIFWFN6703 | RIFWFN7203 | RIFWFN8403 | RIFWFN9603 |
| A   | RIFWFN2802 | RIFWFN3201 | RIFWFN3202 | RIFWFN3602 | RIFWFN4202 | RIFWFN4802 | RIFWFN5602 | RIFWFN6402 | RIFWFN6703 | RIFWFN7203 | RIFWFN8403 | RIFWFN9603 |

A grey background indicates the accessory must be assembled in the factory

## Isolating kit

| Ver | 0701  | 0801  | 0901  | 1101  | 1251  | 1401  | 1601  | 1801  | 2101  | 2401  | 2502 | 2801  | 2802 | 3201  | 3202 | 3602 | 4202 | 4802 | 5602 | 6402 | 6703 | 7203 | 8403 | 9603 |
|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|------|-------|------|------|------|------|------|------|------|------|------|------|
| °   | -     | -     | -     | -     | -     | -     | -     | -     | -     | -     | -    | -     | -    | -     | -    | -    | -    | -    | -    | -    | ISG5 | ISG5 | ISG6 | ISG6 |
| A   | ISG10 | ISG10 | ISG10 | ISG10 | ISG11 | ISG12 | ISG13 | ISG13 | ISG14 | ISG14 | ISG1 | ISG15 | ISG1 | ISG15 | ISG2 | ISG2 | ISG2 | ISG3 | ISG3 | ISG3 | ISG7 | ISG8 | ISG8 | ISG8 |

A grey background indicates the accessory must be assembled in the factory

## CONFIGURATOR

| Field          | Description                                                                                                                                                   |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1,2,3</b>   | <b>WFN</b>                                                                                                                                                    |
| <b>4,5,6,7</b> | <b>Size</b><br>0701, 0801, 0901, 1101, 1251, 1401, 1601, 1801, 2101, 2401, 2502, 2801, 2802, 3201, 3202, 3602, 4202, 4802, 5602, 6402, 6703, 7203, 8403, 9603 |
| <b>8</b>       | <b>Model</b>                                                                                                                                                  |
| °              | Heat pump reversible on the water side                                                                                                                        |
| <b>9</b>       | <b>Version</b>                                                                                                                                                |
| °              | Standard (1)                                                                                                                                                  |
| A              | High efficiency                                                                                                                                               |
| <b>10</b>      | <b>Operating field</b>                                                                                                                                        |
| X              | Electronic thermostatic expansion valve (2)                                                                                                                   |
| Z              | Double electronic thermostatic for low temperature (3)                                                                                                        |
| <b>11</b>      | <b>Set-up</b>                                                                                                                                                 |
| K              | Super silenced                                                                                                                                                |
| L              | Silenced with hood                                                                                                                                            |
| °              | Standard                                                                                                                                                      |
| <b>12</b>      | <b>Heat recovery</b>                                                                                                                                          |
| D              | With desuperheater (4)                                                                                                                                        |
| T              | With total recovery (4)                                                                                                                                       |
| °              | Without heat recovery                                                                                                                                         |

| Field     | Description                                                                                |
|-----------|--------------------------------------------------------------------------------------------|
| <b>13</b> | <b>Evaporator</b>                                                                          |
| E         | Evaporating unit                                                                           |
| °         | Standard                                                                                   |
| <b>14</b> | <b>Power supply</b>                                                                        |
| 2         | 230V/3/50Hz with fuses on compressors and magnet circuit breakers on auxiliary circuit (5) |
| 4         | 230V/3/50Hz with magnet circuit breakers on compressors and auxiliary circuit (5)          |
| 5         | 500V/3/50Hz with fuses on compressors and magnet circuit breakers on auxiliary circuit     |
| 8         | 400V/3/50Hz with magnet circuit breakers on compressors and auxiliary circuit              |
| 9         | 500V/3/50Hz with magnet circuit breakers on compressors and auxiliary circuit (5)          |
| °         | 400V/3/50Hz with fuses on compressors and magnet circuit breakers on auxiliary circuit (5) |
| <b>15</b> | <b>Refrigerant gas</b>                                                                     |
| G         | R513A (XP10)                                                                               |
| °         | R134a                                                                                      |

(1) Only for sizes from 6703 to 9603

(2) Water produced from 0 °C ÷ 16 °C

(3) Water produced from -8 °C up to 10 °C

(4) Not available for the condenserless "E"

(5) The 230V and 500V power supplies are only available for sizes 0701 - 0801 - 0901 - 1101 - 1251 - 1401 - 2502 - 2802

## PERFORMANCE SPECIFICATIONS

### WFN 0701 - 3201 - version A - gas R134a

| Size                                         |     | 0701   | 0801   | 0901   | 1101   | 1251   | 1401   | 1601    | 1801    | 2101    | 2401    | 2801    | 3201    |
|----------------------------------------------|-----|--------|--------|--------|--------|--------|--------|---------|---------|---------|---------|---------|---------|
| <b>Cooling performance 12 °C / 7 °C (1)</b>  |     |        |        |        |        |        |        |         |         |         |         |         |         |
| Cooling capacity                             | kW  | 182,1  | 207,2  | 232,9  | 295,9  | 322,1  | 370,3  | 448,8   | 504,1   | 579,3   | 655,9   | 719,6   | 788,4   |
| Input power                                  | kW  | 35,2   | 40,2   | 45,6   | 55,9   | 60,5   | 68,8   | 83,9    | 95,0    | 106,4   | 120,6   | 136,6   | 149,7   |
| Cooling total input current                  | A   | 63,00  | 71,00  | 79,00  | 91,00  | 104,00 | 120,00 | 138,00  | 156,00  | 170,00  | 200,00  | 223,00  | 248,00  |
| EER                                          | W/W | 5,18   | 5,16   | 5,11   | 5,30   | 5,32   | 5,38   | 5,35    | 5,31    | 5,45    | 5,44    | 5,27    | 5,27    |
| Water flow rate system side                  | l/h | 31.347 | 35.658 | 40.063 | 50.900 | 55.401 | 63.688 | 77.171  | 86.683  | 99.596  | 112.777 | 123.733 | 135.542 |
| Pressure drop system side                    | kPa | 40     | 46     | 46     | 40     | 40     | 41     | 28      | 35      | 27      | 37      | 45      | 27      |
| Water flow rate source side                  | l/h | 37.125 | 42.261 | 47.577 | 60.109 | 65.418 | 75.101 | 91.161  | 102.491 | 117.368 | 132.862 | 146.434 | 160.587 |
| Pressure drop source side                    | kPa | 37     | 37     | 34     | 44     | 37     | 33     | 33      | 33      | 33      | 34      | 33      | 32      |
| <b>Heating performance 40 °C / 45 °C (2)</b> |     |        |        |        |        |        |        |         |         |         |         |         |         |
| Heating capacity                             | kW  | 204,8  | 230,6  | 262,5  | 327,5  | 358,1  | 410,4  | 494,2   | 556,2   | 639,5   | 733,2   | 796,8   | 879,7   |
| Input power                                  | kW  | 44,4   | 50,8   | 57,8   | 70,4   | 76,6   | 87,1   | 104,0   | 118,2   | 131,8   | 150,4   | 169,5   | 188,1   |
| Heating total input current                  | A   | 78,00  | 88,00  | 98,00  | 113,00 | 130,00 | 149,00 | 170,00  | 191,00  | 209,00  | 246,00  | 272,00  | 308,00  |
| COP                                          | W/W | 4,61   | 4,54   | 4,54   | 4,65   | 4,68   | 4,71   | 4,75    | 4,70    | 4,85    | 4,87    | 4,70    | 4,68    |
| Water flow rate system side                  | l/h | 35.533 | 40.021 | 45.575 | 56.858 | 62.177 | 71.260 | 85.815  | 96.600  | 111.065 | 127.339 | 138.391 | 152.791 |
| Pressure drop system side                    | kPa | 34     | 33     | 31     | 40     | 33     | 29     | 30      | 29      | 30      | 31      | 29      | 29      |
| Water flow rate source side                  | l/h | 47.178 | 52.944 | 60.295 | 75.577 | 82.711 | 94.940 | 114.197 | 128.417 | 148.521 | 170.834 | 184.231 | 202.358 |
| Pressure drop source side                    | kPa | 90     | 101    | 103    | 88     | 89     | 91     | 61      | 78      | 61      | 85      | 101     | 60      |

(1) Date 14511:2022; Water user side 12 °C / 7 °C; Water source side 30 °C / 35 °C

(2) Date 14511:2022; Water user side 40 °C / 45 °C; Water source side 10 °C / 7 °C

**WFN 2502 - 9603 - version A - gas R134a**

| Size                                         |     | 2502    | 2802    | 3202    | 3602    | 4202    | 4802    | 5602    | 6402    | 6703    | 7203    | 8403    | 9603    |
|----------------------------------------------|-----|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| <b>Cooling performance 12 °C / 7 °C (1)</b>  |     |         |         |         |         |         |         |         |         |         |         |         |         |
| Cooling capacity                             | kW  | 652,3   | 746,8   | 905,7   | 1024,5  | 1164,3  | 1325,5  | 1446,9  | 1589,7  | 1721,1  | 1960,7  | 2149,5  | 2349,3  |
| Input power                                  | kW  | 121,4   | 137,8   | 167,7   | 189,5   | 213,7   | 242,9   | 270,4   | 296,6   | 317,6   | 359,9   | 406,3   | 445,4   |
| Cooling total input current                  | A   | 208,00  | 239,00  | 275,00  | 310,00  | 341,00  | 401,00  | 447,00  | 493,00  | 509,00  | 598,00  | 667,00  | 739,00  |
| EER                                          | W/W | 5,37    | 5,42    | 5,40    | 5,41    | 5,45    | 5,46    | 5,35    | 5,36    | 5,42    | 5,45    | 5,29    | 5,28    |
| Water flow rate system side                  | l/h | 112.179 | 128.411 | 155.723 | 176.117 | 200.144 | 227.870 | 248.717 | 273.259 | 295.856 | 337.027 | 369.472 | 403.784 |
| Pressure drop system side                    | kPa | 51      | 41      | 38      | 29      | 33      | 45      | 32      | 38      | 83      | 55      | 51      | 30      |
| Water flow rate source side                  | l/h | 132.175 | 151.199 | 183.520 | 207.646 | 235.653 | 268.115 | 293.728 | 322.600 | 348.857 | 396.964 | 437.212 | 478.412 |
| Pressure drop source side                    | kPa | 49      | 50      | 49      | 49      | 50      | 49      | 48      | 46      | 34      | 32      | 32      | 36      |
| <b>Heating performance 40 °C / 45 °C (2)</b> |     |         |         |         |         |         |         |         |         |         |         |         |         |
| Heating capacity                             | kW  | 726,4   | 828,1   | 1001,4  | 1138,6  | 1283,2  | 1459,8  | 1589,2  | 1809,3  | 1911,8  | 2159,8  | 2376,5  | 2610,0  |
| Input power                                  | kW  | 154,8   | 174,8   | 209,3   | 234,9   | 264,8   | 302,9   | 332,5   | 371,1   | 396,0   | 450,7   | 504,3   | 547,7   |
| Heating total input current                  | A   | 260,00  | 298,00  | 339,00  | 381,00  | 418,00  | 492,00  | 545,00  | 606,00  | 624,00  | 733,00  | 812,00  | 900,00  |
| COP                                          | W/W | 4,69    | 4,74    | 4,78    | 4,85    | 4,85    | 4,82    | 4,78    | 4,88    | 4,83    | 4,79    | 4,71    | 4,77    |
| Water flow rate system side                  | l/h | 126.142 | 143.812 | 173.923 | 197.757 | 222.889 | 253.571 | 276.062 | 314.312 | 332.129 | 375.231 | 412.895 | 453.465 |
| Pressure drop system side                    | kPa | 45      | 45      | 44      | 45      | 45      | 44      | 43      | 44      | 31      | 28      | 28      | 32      |
| Water flow rate source side                  | l/h | 168.271 | 191.878 | 232.387 | 264.585 | 298.364 | 339.696 | 368.017 | 421.779 | 444.410 | 502.013 | 549.582 | 603.144 |
| Pressure drop source side                    | kPa | 114     | 92      | 85      | 65      | 73      | 101     | 70      | 91      | 97      | 122     | 112     | 66      |

(1) Date 14511:2022; Water user side 12 °C / 7 °C; Water source side 30 °C / 35 °C

(2) Date 14511:2022; Water user side 40 °C / 45 °C; Water source side 10 °C / 7 °C

**WFN 6703 - 9603 - version ° - gas R134a**

| Size                                         |     | 6703    | 7203    | 8403    | 9603    |
|----------------------------------------------|-----|---------|---------|---------|---------|
| <b>Cooling performance 12 °C / 7 °C (1)</b>  |     |         |         |         |         |
| Cooling capacity                             | kW  | 1691,1  | 1925,6  | 2120,1  | 2310,0  |
| Input power                                  | kW  | 322,4   | 364,9   | 407,2   | 452,6   |
| Cooling total input current                  | A   | 505,00  | 594,00  | 660,00  | 733,00  |
| EER                                          | W/W | 5,00    | 5,00    | 5,00    | 5,00    |
| Water flow rate system side                  | l/h | 290.696 | 330.989 | 364.406 | 397.041 |
| Pressure drop system side                    | kPa | 46      | 52      | 39      | 46      |
| Water flow rate source side                  | l/h | 343.740 | 390.980 | 431.894 | 471.655 |
| Pressure drop source side                    | kPa | 70      | 70      | 58      | 69      |
| <b>Heating performance 40 °C / 45 °C (2)</b> |     |         |         |         |         |
| Heating capacity                             | kW  | 1885,5  | 2129,2  | 2348,8  | 2575,2  |
| Input power                                  | kW  | 401,0   | 454,4   | 501,6   | 558,6   |
| Heating total input current                  | A   | 619,00  | 728,00  | 803,00  | 893,00  |
| COP                                          | W/W | 5,00    | 5,00    | 5,00    | 5,00    |
| Water flow rate system side                  | l/h | 327.527 | 369.895 | 408.061 | 447.398 |
| Pressure drop system side                    | kPa | 64      | 63      | 52      | 62      |
| Water flow rate source side                  | l/h | 436.659 | 493.020 | 542.047 | 593.071 |
| Pressure drop source side                    | kPa | 105     | 115     | 86      | 103     |

(1) Date 14511:2022; Water user side 12 °C / 7 °C; Water source side 30 °C / 35 °C

(2) Date 14511:2022; Water user side 40 °C / 45 °C; Water source side 10 °C / 7 °C

**ENERGY INDICES (REG. 2016/2281 EU)**

| Size                                                                   |      | 0701    | 0801    | 0901    | 1101    | 1251    | 1401    | 1601    | 1801    | 2101    | 2401    | 2801    | 3201    |
|------------------------------------------------------------------------|------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| <b>Refrigerant gas: °</b>                                              |      |         |         |         |         |         |         |         |         |         |         |         |         |
| <b>SEER - 12/7 (EN14825: 2018)</b>                                     |      |         |         |         |         |         |         |         |         |         |         |         |         |
| SEER                                                                   | W/W  | 6,64    | 6,87    | 6,80    | 6,55    | 6,76    | 6,83    | 6,79    | 6,85    | 6,94    | 6,94    | 6,62    | 6,75    |
| Seasonal efficiency                                                    | %    | 262,60  | 271,70  | 269,00  | 259,00  | 267,50  | 270,00  | 268,40  | 270,90  | 274,50  | 274,50  | 261,70  | 267,10  |
| Water Regulation (1)                                                   | type | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW |
| <b>SEPR - (EN 14825: 2018)</b>                                         |      |         |         |         |         |         |         |         |         |         |         |         |         |
| SEPR                                                                   | W/W  | 8,10    | 8,00    | 8,10    | 8,10    | 8,00    | 8,00    | 8,00    | 8,00    | 8,10    | 8,00    | 8,10    | 8,10    |
| Water Regulation (1)                                                   | type | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW |
| <b>Performance in average ambient conditions (average) - 55 °C (2)</b> |      |         |         |         |         |         |         |         |         |         |         |         |         |
| Pdesignh                                                               | kW   | 264,00  | 294,00  | 339,00  | 417,00  | -       | -       | -       | -       | -       | -       | -       | -       |
| SCOP                                                                   | W/W  | 4,58    | 4,63    | 4,55    | 4,73    | -       | -       | -       | -       | -       | -       | -       | -       |
| ηsh                                                                    | %    | 175,00  | 177,00  | 174,00  | 181,00  | -       | -       | -       | -       | -       | -       | -       | -       |
| Water Regulation (1)                                                   | type | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | -       | -       | -       | -       | -       | -       | -       | -       |

(1) VW/VO - variable water flow rate/variable outlet temperature; FW/VO - fixed water flow rate/variable outlet temperature; VW/FO - variable water flow rate/fixed outlet temperature; FW/FO - fixed water flow rate/fixed outlet temperature.

(2) Efficiencies for average temperature applications (55 °C)

| Size                               |   |      | 2502    | 2802    | 3202    | 3602    | 4202    | 4802    | 5602    | 6402    | 6703    | 7203    | 8403    | 9603    |
|------------------------------------|---|------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| <b>Refrigerant gas: °</b>          |   |      |         |         |         |         |         |         |         |         |         |         |         |         |
| <b>SEER - 12/7 (EN14825: 2018)</b> |   |      |         |         |         |         |         |         |         |         |         |         |         |         |
| SEER                               | ° | W/W  | -       | -       | -       | -       | -       | -       | -       | -       | 6,88    | 6,98    | 7,02    | 6,85    |
|                                    | A | W/W  | 7,06    | 7,19    | 7,07    | 7,23    | 7,24    | 7,18    | 7,01    | 7,14    | 7,37    | 7,44    | 7,31    | 7,34    |
| Seasonal efficiency                | ° | %    | -       | -       | -       | -       | -       | -       | -       | -       | 272,30  | 276,20  | 277,70  | 270,80  |
|                                    | A | %    | 279,50  | 284,60  | 279,80  | 286,30  | 286,50  | 284,30  | 277,30  | 282,40  | 291,90  | 294,50  | 289,50  | 290,40  |
| Water Regulation (1)               | ° | type | -       | -       | -       | -       | -       | -       | -       | -       | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW |
|                                    | A | type | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW | VWVO/VW |
| <b>SEPR - (EN 14825: 2018)</b>     |   |      |         |         |         |         |         |         |         |         |         |         |         |         |
| SEPR                               | ° | W/W  | -       | -       | -       | -       | -       | -       | -       | -       | 8,50    | 8,50    | 8,20    | 8,20    |
|                                    | A | W/W  | 8,20    | 8,20    | 8,30    | 8,20    | 8,30    | 8,30    | 8,30    | 8,50    | 8,60    | 8,60    | 8,50    | 8,40    |
| Water Regulation (1)               | ° | type | -       | -       | -       | -       | -       | -       | -       | -       | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW |
|                                    | A | type | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW | FWVO/FW |

(1) VW/VO - variable water flow rate/variable outlet temperature; FW/VO - fixed water flow rate/variable outlet temperature; VW/FO - variable water flow rate/fixed outlet temperature; FW/FO - fixed water flow rate/fixed outlet temperature.

## PERFORMANCE SPECIFICATIONS EVAPORATING UNITS

### WFN - AE- gas R134a

| Size                                                    |  |     | 0701   | 0801   | 0901   | 1101   | 1251   | 1401   | 1601   | 1801   | 2101   | 2401    | 2801    | 3201    |
|---------------------------------------------------------|--|-----|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|
| <b>Evaporator: E</b>                                    |  |     |        |        |        |        |        |        |        |        |        |         |         |         |
| <b>Cooling performance 12 °C / 7 °C - gas R134a (1)</b> |  |     |        |        |        |        |        |        |        |        |        |         |         |         |
| Cooling capacity                                        |  | kW  | 162,7  | 185,3  | 208,6  | 264,5  | 289,4  | 331,9  | 398,9  | 449,2  | 519,2  | 588,2   | 640,8   | 701,8   |
| Input power                                             |  | kW  | 41,4   | 47,2   | 53,8   | 65,8   | 71,8   | 81,7   | 98,8   | 111,7  | 125,2  | 141,5   | 158,8   | 175,4   |
| Cooling total input current                             |  | A   | 74,00  | 83,00  | 94,00  | 109,00 | 124,00 | 141,00 | 164,00 | 185,00 | 203,00 | 236,00  | 263,00  | 290,00  |
| EER                                                     |  | W/W | 3,93   | 3,92   | 3,88   | 4,02   | 4,03   | 4,06   | 4,04   | 4,02   | 4,15   | 4,16    | 4,03    | 4,00    |
| Evaporator water flow rate                              |  | l/h | 27.948 | 31.843 | 35.845 | 45.444 | 49.721 | 57.032 | 68.528 | 77.175 | 89.209 | 101.057 | 110.092 | 120.581 |
| Pressure drop evaporator side                           |  | kPa | 32     | 36     | 37     | 32     | 32     | 33     | 22     | 28     | 22     | 30      | 36      | 21      |
| <b>Length of refrigerant lines from/to 0 - 10 m</b>     |  |     |        |        |        |        |        |        |        |        |        |         |         |         |
| Gas line (C1)                                           |  | Ø   | 42,0   | 54,0   | 54,0   | 54,0   | 67,0   | 67,0   | 67,0   | 76,0   | 76,0   | 89,0    | 89,0    | 89,0    |
| Gas line (C2)                                           |  | Ø   | -      | -      | -      | -      | -      | -      | -      | -      | -      | -       | -       | -       |
| Gas line (C3)                                           |  | Ø   | -      | -      | -      | -      | -      | -      | -      | -      | -      | -       | -       | -       |
| Liquid line (C1)                                        |  | Ø   | 28,0   | 35,0   | 35,0   | 35,0   | 42,0   | 42,0   | 42,0   | 42,0   | 54,0   | 54,0    | 54,0    | 54,0    |
| Liquid line (C2)                                        |  | Ø   | -      | -      | -      | -      | -      | -      | -      | -      | -      | -       | -       | -       |
| Liquid line (C3)                                        |  | Ø   | -      | -      | -      | -      | -      | -      | -      | -      | -      | -       | -       | -       |

(1) Service side water 12 °C / 7 °C; Condensing temperature 45 °C

| Size                                                    |  |     | 2502    | 2802    | 3202    | 3602    | 4202    | 4802    | 5602    | 6402    | 6703    | 7203    | 8403    | 9603    |
|---------------------------------------------------------|--|-----|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| <b>Evaporator: E</b>                                    |  |     |         |         |         |         |         |         |         |         |         |         |         |         |
| <b>Cooling performance 12 °C / 7 °C - gas R134a (1)</b> |  |     |         |         |         |         |         |         |         |         |         |         |         |         |
| Cooling capacity                                        |  | kW  | 584,6   | 668,6   | 803,3   | 911,8   | 1043,5  | 1186,8  | 1284,6  | 1414,9  | 1544,3  | 1758,8  | 1912,5  | 2076,9  |
| Input power                                             |  | kW  | 143,3   | 163,2   | 196,5   | 222,8   | 249,8   | 283,2   | 317,9   | 349,1   | 373,7   | 422,6   | 474,7   | 523,3   |
| Cooling total input current                             |  | A   | 246,70  | 282,20  | 326,30  | 368,70  | 405,50  | 472,60  | 525,90  | 578,30  | 606,70  | 705,80  | 785,60  | 867,10  |
| EER                                                     |  | W/W | 4,08    | 4,10    | 4,09    | 4,09    | 4,18    | 4,19    | 4,04    | 4,05    | 4,13    | 4,16    | 4,03    | 3,97    |
| Evaporator water flow rate                              |  | l/h | 100.443 | 114.870 | 138.020 | 156.649 | 179.280 | 203.906 | 220.716 | 243.093 | 265.322 | 302.189 | 328.596 | 356.829 |
| Pressure drop evaporator side                           |  | kPa | 41      | 33      | 30      | 23      | 27      | 36      | 25      | 30      | 35      | 44      | 40      | 23      |
| <b>Length of refrigerant lines from/to 0 - 10 m</b>     |  |     |         |         |         |         |         |         |         |         |         |         |         |         |
| Gas line (C1)                                           |  | Ø   | 67,0    | 67,0    | 67,0    | 76,0    | 76,0    | 88,9    | 88,9    | 88,9    | 76,0    | 88,9    | 88,9    | 88,9    |
| Gas line (C2)                                           |  | Ø   | 67,0    | 67,0    | 67,0    | 76,0    | 76,0    | 88,9    | 88,9    | 88,9    | 76,0    | 88,9    | 88,9    | 88,9    |
| Gas line (C3)                                           |  | Ø   | -       | -       | -       | -       | -       | -       | -       | 42,0    | 76,0    | 88,9    | 88,9    | 88,9    |
| Liquid line (C1)                                        |  | Ø   | 42,0    | 42,0    | 42,0    | 42,0    | 54,0    | 54,0    | 54,0    | 54,0    | 54,0    | 54,0    | 54,0    | 54,0    |
| Liquid line (C2)                                        |  | Ø   | 42,0    | 42,0    | 42,0    | 42,0    | 54,0    | 54,0    | 54,0    | 54,0    | 54,0    | 54,0    | 54,0    | 54,0    |
| Liquid line (C3)                                        |  | Ø   | -       | -       | -       | -       | -       | -       | -       | -       | 54,0    | 54,0    | 54,0    | 54,0    |

(1) Service side water 12 °C / 7 °C; Condensing temperature 45 °C

### WFN - °E - gas R134a

| Size                                                    |  |  |     | 6703    |  | 7203    |  | 8403    |  | 9603    |
|---------------------------------------------------------|--|--|-----|---------|--|---------|--|---------|--|---------|
| <b>Evaporator: E</b>                                    |  |  |     |         |  |         |  |         |  |         |
| <b>Cooling performance 12 °C / 7 °C - gas R134a (1)</b> |  |  |     |         |  |         |  |         |  |         |
| Cooling capacity                                        |  |  | kW  | 1500,1  |  | 1704,7  |  | 1830,1  |  | 1998,5  |
| Input power                                             |  |  | kW  | 375,4   |  | 424,4   |  | 474,7   |  | 524,9   |
| Cooling total input current                             |  |  | A   | 609,00  |  | 708,00  |  | 786,00  |  | 869,00  |
| EER                                                     |  |  | W/W | 4,00    |  | 4,02    |  | 3,86    |  | 3,81    |
| Evaporator water flow rate                              |  |  | l/h | 257.735 |  | 292.888 |  | 314.432 |  | 343.357 |
| Pressure drop evaporator side                           |  |  | kPa | 36      |  | 41      |  | 29      |  | 35      |
| <b>Length of refrigerant lines from/to 0 - 10 m</b>     |  |  |     |         |  |         |  |         |  |         |
| Gas line (C1)                                           |  |  | Ø   | 76,0    |  | 88,9    |  | 88,9    |  | 88,9    |
| Gas line (C2)                                           |  |  | Ø   | 76,0    |  | 88,9    |  | 88,9    |  | 88,9    |
| Gas line (C3)                                           |  |  | Ø   | 76,0    |  | 88,9    |  | 88,9    |  | 88,9    |
| Liquid line (C1)                                        |  |  | Ø   | 54,0    |  | 54,0    |  | 54,0    |  | 54,0    |
| Liquid line (C2)                                        |  |  | Ø   | 54,0    |  | 54,0    |  | 54,0    |  | 54,0    |
| Liquid line (C3)                                        |  |  | Ø   | 54,0    |  | 54,0    |  | 54,0    |  | 54,0    |

(1) Service side water 12 °C / 7 °C; Condensing temperature 45 °C

## ELECTRIC DATA

| Size                  |   | 0701  | 0801  | 0901  | 1101  | 1251  | 1401  | 1601  | 1801  | 2101  | 2401  | 2801  | 3201  |
|-----------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| <b>Electric data</b>  |   |       |       |       |       |       |       |       |       |       |       |       |       |
| Maximum current (FLA) | A | 106,0 | 119,0 | 136,0 | 162,0 | 183,0 | 208,0 | 243,0 | 275,0 | 305,0 | 350,0 | 389,0 | 427,0 |
| Peak current (LRA)    | A | 166,0 | 195,0 | 232,0 | 303,0 | 317,0 | 344,0 | 439,0 | 468,0 | 589,0 | 653,0 | 808,0 | 920,0 |

| Size                  |   | 2502 | 2802  | 3202  | 3602  | 4202  | 4802  | 5602    | 6402    | 6703    | 7203    | 8403    | 9603    |
|-----------------------|---|------|-------|-------|-------|-------|-------|---------|---------|---------|---------|---------|---------|
| <b>Electric data</b>  |   |      |       |       |       |       |       |         |         |         |         |         |         |
| Maximum current (FLA) | ° | A    | -     | -     | -     | -     | -     | -       | -       | 913,0   | 1.050,0 | 1.166,0 | 1.281,0 |
|                       | A | A    | 365,0 | 416,0 | 486,0 | 549,0 | 609,0 | 700,0   | 777,0   | 854,0   | 913,0   | 1.050,0 | 1.166,0 |
| Peak current (LRA)    | ° | A    | -     | -     | -     | -     | -     | -       | -       | 1.198,0 | 1.353,0 | 1.585,0 | 1.774,0 |
|                       | A | A    | 500,0 | 552,0 | 682,0 | 743,0 | 894,0 | 1.003,0 | 1.197,0 | 1.347,0 | 1.198,0 | 1.353,0 | 1.585,0 |

## GENERAL TECHNICAL DATA

### WFN - A

| Size                              |      | 0701 | 0801 | 0901 | 1101 | 1251 | 1401 | 1601           | 1801 | 2101 | 2401 | 2801  | 3201  |
|-----------------------------------|------|------|------|------|------|------|------|----------------|------|------|------|-------|-------|
| <b>Compressor</b>                 |      |      |      |      |      |      |      |                |      |      |      |       |       |
| Type                              | type |      |      |      |      |      |      | Screw          |      |      |      |       |       |
| Compressor regulation             | type |      |      |      |      |      |      | On-Off         |      |      |      |       |       |
| Number                            | no.  | 1    | 1    | 1    | 1    | 1    | 1    | 1              | 1    | 1    | 1    | 1     | 1     |
| Circuits                          | no.  | 1    | 1    | 1    | 1    | 1    | 1    | 1              | 1    | 1    | 1    | 1     | 1     |
| Refrigerant                       | type |      |      |      |      |      |      | R134a          |      |      |      |       |       |
| Refrigerant load circuit 1 (1)    | kg   | 41,0 | 41,0 | 38,0 | 59,0 | 57,0 | 72,0 | 66,0           | 61,0 | 85,0 | 81,0 | 110,0 | 104,0 |
| <b>System side heat exchanger</b> |      |      |      |      |      |      |      |                |      |      |      |       |       |
| Type                              | type |      |      |      |      |      |      | Shell and tube |      |      |      |       |       |
| Number                            | no.  | 1    | 1    | 1    | 1    | 1    | 1    | 1              | 1    | 1    | 1    | 1     | 1     |
| Connections (in/out)              | Type |      |      |      |      |      |      | Grooved joints |      |      |      |       |       |
| Sizes (in/out)                    | Ø    | 4"   | 4"   | 4"   | 4"   | 5"   | 6"   | 6"             | 6"   | 6"   | 6"   | 8"    | 8"    |
| <b>Source side heat exchanger</b> |      |      |      |      |      |      |      |                |      |      |      |       |       |
| Type                              | type |      |      |      |      |      |      | Shell and tube |      |      |      |       |       |
| Number                            | no.  | 1    | 1    | 1    | 1    | 1    | 1    | 1              | 1    | 1    | 1    | 1     | 1     |
| Connections (in/out)              | Type |      |      |      |      |      |      | Grooved joints |      |      |      |       |       |
| Sizes (in/out)                    | Ø    | 3"   | 3"   | 3"   | 3"   | 4"   | 4"   | 4"             | 4"   | 5"   | 5"   | 6"    | 6"    |

(1) The load indicated in the table is an estimated and preliminary value. The final value of the refrigerant load is indicated on the unit's technical label. For further information contact the office.

| Size                              |         | 2502 | 2802 | 3202 | 3602 | 4202 | 4802 | 5602           | 6402 | 6703 | 7203 | 8403 | 9603 |
|-----------------------------------|---------|------|------|------|------|------|------|----------------|------|------|------|------|------|
| <b>Compressor</b>                 |         |      |      |      |      |      |      |                |      |      |      |      |      |
| Type                              | °A type |      |      |      |      |      |      | Screw          |      |      |      |      |      |
| Compressor regulation             | °A type |      |      |      |      |      |      | On-Off         |      |      |      |      |      |
| Number                            | °A no.  | 2    | 2    | 2    | 2    | 2    | 2    | 2              | 2    | 3    | 3    | 3    | 3    |
| Circuits                          | °A no.  | 2    | 2    | 2    | 2    | 2    | 2    | 2              | 2    | 3    | 3    | 3    | 3    |
| Refrigerant                       | °A type |      |      |      |      |      |      | R134a          |      |      |      |      |      |
| <b>System side heat exchanger</b> |         |      |      |      |      |      |      |                |      |      |      |      |      |
| Type                              | °A type |      |      |      |      |      |      | Shell and tube |      |      |      |      |      |
| Number                            | °A no.  | 1    | 1    | 1    | 1    | 1    | 1    | 1              | 1    | 1    | 1    | 1    | 1    |
| Connections (in/out)              | °A Type |      |      |      |      |      |      | Grooved joints |      |      |      |      |      |
| Sizes (in/out)                    | °A Ø    | 8"   | 8"   | 8"   | 8"   | 10"  | 10"  | 10"            | 10"  | 10"  | 10"  | 10"  | 10"  |
| <b>Source side heat exchanger</b> |         |      |      |      |      |      |      |                |      |      |      |      |      |
| Type                              | °A type |      |      |      |      |      |      | Shell and tube |      |      |      |      |      |
| Number                            | °A no.  | 2    | 2    | 2    | 2    | 2    | 2    | 2              | 2    | 3    | 3    | 3    | 3    |
| Connections (in/out)              | °A Type |      |      |      |      |      |      | Grooved joints |      |      |      |      |      |
| Sizes (in/out)                    | °       | Ø    | -    | -    | -    | -    | -    | -              | -    | 5"   | 5"   | 6"   | 6"   |
|                                   | A       | Ø    | 4"   | 4"   | 5"   | 5"   | 5"   | 6"             | 6"   | 6"   | -    | -    | -    |

## SOUND DATA

### Sound data calculated with functioning in cooling mode - R134a gas

| Size                                             |   | 0701  | 0801 | 0901 | 1101 | 1251 | 1401 | 1601 | 1801 | 2101 | 2401 | 2801 | 3201 |
|--------------------------------------------------|---|-------|------|------|------|------|------|------|------|------|------|------|------|
| <b>Set-up: K</b>                                 |   |       |      |      |      |      |      |      |      |      |      |      |      |
| <b>Sound data calculated in cooling mode (1)</b> |   |       |      |      |      |      |      |      |      |      |      |      |      |
| Sound power level                                | ° | dB(A) | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
|                                                  | A | dB(A) | 78,0 | 78,2 | 77,9 | 79,8 | 80,4 | 80,9 | 81,1 | 81,5 | 84,3 | 82,6 | 85,1 |


(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

| Size                                             |   | 0701  | 0801 | 0901 | 1101 | 1251 | 1401 | 1601 | 1801 | 2101 | 2401 | 2801 | 3201 |
|--------------------------------------------------|---|-------|------|------|------|------|------|------|------|------|------|------|------|
| <b>Set-up: L</b>                                 |   |       |      |      |      |      |      |      |      |      |      |      |      |
| <b>Sound data calculated in cooling mode (1)</b> |   |       |      |      |      |      |      |      |      |      |      |      |      |
| Sound power level                                | ° | dB(A) | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    |
|                                                  | A | dB(A) | 81,0 | 81,2 | 80,9 | 82,8 | 83,4 | 83,9 | 84,1 | 84,5 | 87,3 | 85,5 | 88,1 |

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

| Size                                                                                                                                                                                                                                                                               |   | 0701  | 0801 | 0901 | 1101 | 1251 | 1401 | 1601 | 1801 | 2101 | 2401 | 2801 | 3201  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-------|------|------|------|------|------|------|------|------|------|------|-------|
| Set-up: °                                                                                                                                                                                                                                                                          |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Sound data calculated in cooling mode (1)                                                                                                                                                                                                                                          |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Sound power level                                                                                                                                                                                                                                                                  | ° | dB(A) | -    | -    | -    | -    | -    | -    | -    | -    | -    | -    | -     |
|                                                                                                                                                                                                                                                                                    | A | dB(A) | 87,7 | 88,0 | 87,7 | 89,1 | 90,3 | 91,3 | 90,5 | 90,7 | 93,2 | 92,5 | 87,4  |
| (1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744). |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Size                                                                                                                                                                                                                                                                               |   | 2502  | 2802 | 3202 | 3602 | 4202 | 4802 | 5602 | 6402 | 6703 | 7203 | 8403 | 9603  |
| Set-up: K                                                                                                                                                                                                                                                                          |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Sound data calculated in cooling mode (1)                                                                                                                                                                                                                                          |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Sound power level                                                                                                                                                                                                                                                                  | ° | dB(A) | -    | -    | -    | -    | -    | -    | -    | 88,1 | 87,3 | 89,8 | 90,3  |
|                                                                                                                                                                                                                                                                                    | A | dB(A) | 83,6 | 83,6 | 84,5 | 85,2 | 86,1 | 85,6 | 87,8 | 88,3 | 88,1 | 87,3 | 89,8  |
| (1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744). |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Size                                                                                                                                                                                                                                                                               |   | 2502  | 2802 | 3202 | 3602 | 4202 | 4802 | 5602 | 6402 | 6703 | 7203 | 8403 | 9603  |
| Set-up: L                                                                                                                                                                                                                                                                          |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Sound data calculated in cooling mode (1)                                                                                                                                                                                                                                          |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Sound power level                                                                                                                                                                                                                                                                  | ° | dB(A) | -    | -    | -    | -    | -    | -    | -    | 91,1 | 90,2 | 92,8 | 93,3  |
|                                                                                                                                                                                                                                                                                    | A | dB(A) | 86,6 | 86,6 | 87,5 | 88,2 | 89,1 | 88,5 | 90,8 | 91,3 | 91,1 | 90,2 | 92,8  |
| (1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744). |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Size                                                                                                                                                                                                                                                                               |   | 2502  | 2802 | 3202 | 3602 | 4202 | 4802 | 5602 | 6402 | 6703 | 7203 | 8403 | 9603  |
| Set-up: °                                                                                                                                                                                                                                                                          |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Sound data calculated in cooling mode (1)                                                                                                                                                                                                                                          |   |       |      |      |      |      |      |      |      |      |      |      |       |
| Sound power level                                                                                                                                                                                                                                                                  | ° | dB(A) | -    | -    | -    | -    | -    | -    | -    | 97,0 | 97,2 | 99,5 | 100,0 |
|                                                                                                                                                                                                                                                                                    | A | dB(A) | 93,5 | 94,0 | 94,0 | 94,5 | 95,0 | 95,5 | 97,5 | 98,0 | 97,0 | 97,2 | 99,5  |
| (1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744). |   |       |      |      |      |      |      |      |      |      |      |      |       |

## DIMENSIONS

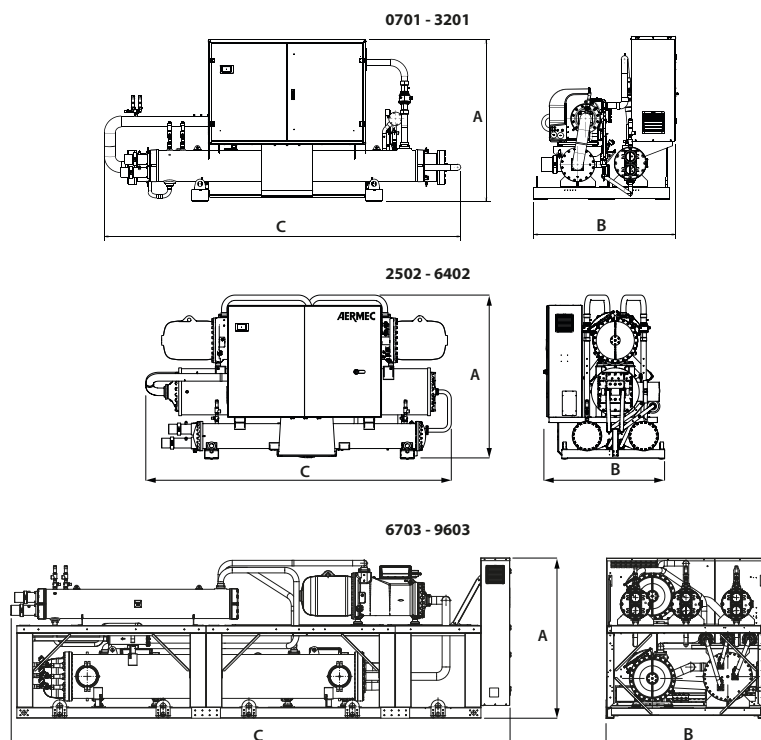

**WFN 0701-9603 ver. A**

| Size                                                   |    | 0701  | 0801  | 0901  | 1101  | 1251  | 1401  | 1601  | 1801  | 2101   | 2401   | 2801   | 3201   |
|--------------------------------------------------------|----|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| <b>Dimensions and weights - standard configuration</b> |    |       |       |       |       |       |       |       |       |        |        |        |        |
| A                                                      | mm | 1720  | 1720  | 1720  | 1720  | 1790  | 1865  | 1865  | 1865  | 1887   | 1887   | 1920   | 1920   |
| B                                                      | mm | 1450  | 1450  | 1450  | 1510  | 1550  | 1610  | 1610  | 1610  | 1610   | 1610   | 1630   | 1630   |
| C                                                      | mm | 3480  | 3480  | 3480  | 3470  | 3445  | 3560  | 4100  | 4100  | 4140   | 4252   | 4290   | 4290   |
| Empty weight                                           | kg | 1.610 | 1.630 | 1.630 | 2.120 | 2.130 | 2.350 | 2.940 | 2.980 | 3.260  | 3.320  | 3.820  | 3.870  |
| <b>Dimensions and weights - quiet configuration</b>    |    |       |       |       |       |       |       |       |       |        |        |        |        |
| A                                                      | mm | 1720  | 1720  | 1720  | 1720  | 1790  | 1865  | 1865  | 1865  | 1887   | 1887   | 1920   | 1920   |
| B                                                      | mm | 1450  | 1450  | 1450  | 1540  | 1600  | 1610  | 1610  | 1610  | 1630   | 1630   | 1645   | 1645   |
| C                                                      | mm | 3480  | 3480  | 3480  | 3470  | 3445  | 3560  | 4100  | 4100  | 4140   | 4252   | 4290   | 4290   |
| Empty weight                                           | kg | 1.770 | 1.790 | 1.790 | 2.280 | 2.290 | 2.510 | 3.120 | 3.170 | 3.450  | 3.510  | 4.030  | 4.080  |
| <b>Super silenced equipment dimensions and weights</b> |    |       |       |       |       |       |       |       |       |        |        |        |        |
| A                                                      | mm | 1720  | 1720  | 1720  | 1720  | 1790  | 1865  | 1865  | 1865  | 1887   | 1887   | 1920   | 1920   |
| B                                                      | mm | 1450  | 1450  | 1450  | 1540  | 1600  | 1610  | 1610  | 1610  | 1630   | 1630   | 1645   | 1645   |
| C                                                      | mm | 3480  | 3480  | 3480  | 3470  | 3445  | 3560  | 4100  | 4100  | 4140   | 4252   | 4290   | 4290   |
| Empty weight                                           | kg | 1.960 | 1.980 | 1.980 | 2.470 | 2.480 | 2.700 | 3.340 | 3.390 | 3.670  | 3.730  | 4.280  | 4.330  |
| Size                                                   |    | 2502  | 2802  | 3202  | 3602  | 4202  | 4802  | 5602  | 6402  | 6703   | 7203   | 8403   | 9603   |
| <b>Dimensions and weights - standard configuration</b> |    |       |       |       |       |       |       |       |       |        |        |        |        |
| A                                                      | mm | 2000  | 2075  | 2195  | 2195  | 2340  | 2432  | 2440  | 2432  | 2250   | 2250   | 2250   | 2250   |
| B                                                      | mm | 1500  | 1500  | 1575  | 1575  | 1585  | 1845  | 1800  | 1800  | 2200   | 2200   | 2200   | 2200   |
| C                                                      | mm | 4320  | 4345  | 4380  | 4380  | 4395  | 4535  | 4605  | 4605  | 6840   | 6840   | 6840   | 6840   |
| Empty weight                                           | kg | 3.810 | 4.100 | 5.690 | 5.750 | 6.300 | 6.670 | 6.970 | 7.070 | 10.320 | 11.670 | 12.270 | 12.360 |
| <b>Dimensions and weights - quiet configuration</b>    |    |       |       |       |       |       |       |       |       |        |        |        |        |
| A                                                      | mm | 2000  | 2075  | 2195  | 2195  | 2340  | 2432  | 2440  | 2432  | 2250   | 2250   | 2250   | 2250   |
| B                                                      | mm | 1500  | 1500  | 1575  | 1575  | 1585  | 1845  | 1800  | 1800  | 2200   | 2200   | 2200   | 2200   |
| C                                                      | mm | 4320  | 4345  | 4650  | 4650  | 4600  | 5015  | 5150  | 5150  | 6840   | 6840   | 6840   | 6840   |
| Empty weight                                           | kg | 4.120 | 4.410 | 6.050 | 6.120 | 6.670 | 7.040 | 7.420 | 7.490 | 10.880 | 12.230 | 12.950 | 12.990 |
| <b>Super silenced equipment dimensions and weights</b> |    |       |       |       |       |       |       |       |       |        |        |        |        |
| A                                                      | mm | 2000  | 2075  | 2195  | 2195  | 2340  | 2432  | 2440  | 2432  | 2250   | 2250   | 2250   | 2250   |
| B                                                      | mm | 1500  | 1500  | 1575  | 1575  | 1585  | 1845  | 1800  | 1800  | 2200   | 2200   | 2200   | 2200   |
| C                                                      | mm | 4320  | 4345  | 4650  | 4650  | 4600  | 5015  | 5150  | 5150  | 6840   | 6840   | 6840   | 6840   |
| Empty weight                                           | kg | 4.500 | 4.790 | 6.480 | 6.550 | 7.100 | 7.470 | 7.890 | 7.990 | 11.530 | 12.880 | 13.650 | 13.740 |

**WFN 6703-9603 ver. °**

| Size                                                   |    | 6703   | 7203   | 8403   | 9603   |
|--------------------------------------------------------|----|--------|--------|--------|--------|
| <b>Dimensions and weights - standard configuration</b> |    |        |        |        |        |
| A                                                      | mm | 2250   | 2250   | 2250   | 2250   |
| B                                                      | mm | 2200   | 2200   | 2200   | 2200   |
| C                                                      | mm | 5650   | 5650   | 5650   | 5650   |
| Empty weight                                           | kg | 9.330  | 9.910  | 10.130 | 10.200 |
| <b>Dimensions and weights - quiet configuration</b>    |    |        |        |        |        |
| A                                                      | mm | 2250   | 2250   | 2250   | 2250   |
| B                                                      | mm | 2200   | 2200   | 2200   | 2200   |
| C                                                      | mm | 5650   | 5650   | 5650   | 5650   |
| Empty weight                                           | kg | 9.890  | 10.470 | 10.760 | 10.830 |
| <b>Super silenced equipment dimensions and weights</b> |    |        |        |        |        |
| A                                                      | mm | 2250   | 2250   | 2250   | 2250   |
| B                                                      | mm | 2200   | 2200   | 2200   | 2200   |
| C                                                      | mm | 5650   | 5650   | 5650   | 5650   |
| Empty weight                                           | kg | 10.540 | 11.120 | 11.510 | 11.580 |

■ For the sizes of D-T-E versions please contact the factory.

■ For the size of the units with the RIF accessory we ask you to contact the headquarters.

Aermec reserves the right to make any modifications deemed necessary. All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

**Aermec S.p.A.**  
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia  
Tel. 0442633111 - Telefax 044293577  
www.aermec.com